

XEED

COMPACT INSTALL MULTIMEDIA PROJECTOR

Canon

Delighting You Always



ULTRA-BRIGHT, HIGH-RESOLUTION MULTI-VENUE PROJECTOR

Make every impression count with Canon XEED WUX6010 LCOS Projector. Equipped with Canon's LCOS Technology with AISYS-enhancement, it features 6000 lumens in brightness and high-resolution (1920 x 1200) for crisp, rich and vivid widescreen video and images. Ideal for venues from large conferences to auditoriums and classrooms, it comes built-in with HDBaseT™, HDMI and DVI for versatile connectivity.



Stunning Quality



Efficient Connectivity

XEED WUX6010
MULTIMEDIA PROJECTOR



Stunning Quality



With brightness levels of 6000 lumens and native WUXGA resolution, it delivers rich, vibrant quality even in bright ambient settings.



Efficient Connectivity

HDBase™ connectivity makes setting up significantly simpler and facilitates long cable runs.



Adaptable to any space

Compatible with a selection of five interchangeable projection lenses for different needs. Use the Ultra Long Zoom Lenses for bigger events such as conferences and large seminars.



PROJECTOR SPECIFICATIONS

PROJECTION SYSTEM	Imaging Device	0.71" LCOS Reflective Panels x3	BUILT-IN SOUND	Internal Speaker	5W, Mono		
	Aspect Ratio	16:10		REMOTE CONTROL	Wireless Remote	Infrared (Supplied) or Wired (Optional)	
	Native Resolution	1920 x 1200 (WUXGA)			INPUT SIGNALS	Scanning Frequency	H: 27kHz – 75kHz, V: 24Hz – 60Hz
	Brightness ^{1, 2}	6000 Lumens (Normal) / 4660 Lumens (Power Saver)				Analog PC Input	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA
	Contrast Ratio ^{1, 3}	2000:1				Digital PC Input	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA
	Digital Keystone ⁴	V ± 20°, H ± 20°				Digital Video Input	1080p / 1080i / 720p / 576p / 480p
	Uniformity ¹	88%				Component Video Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i
		Dot Clock	162MHz				
IMAGE ADJUSTMENTS	Image Mode	Standard / Presentation / Dynamic / Video / Cinema / Photo / sRGB / Vivid Photo / User 1 / User 2 / User 3 / User 4 / User 5	LAMP	Type		340-NSHA	
	Colour Adjustment	Colour Level, Colour Balance, Colour Temperature, Gain (R,G,B), Offset (R,G,B)		Life ⁵	3000 Hours (Full Power) / 4000 Hours (Power Saver)		
	Wall Colour Correction	Normal / Greenboard / Adjust (Custom)		Power ³	340 / 264W		
	Mounting	360° Projection	RATINGS	Fan Noise ³	40dB (Full Power) / 36dB (Power Saver)		
	Tilt Angle	Bottom Front: 2 Places (Max. Angles: 6° Elevation)		Power Consumption ³	465W (Full Power) / 370W (Power Saver)		
		Standby Power ⁵		2.0 – 0.3W			
		Power Voltage		AC 100 ~ 240V, 50 / 60Hz			
		Operating Temperature		32°F – 104°F (0°C – 40°C) (20%RH -85%RH)			
TERMINALS	DVI-I	Digital PC / Analog PC Input	Storage Temperature	-22°F – 140°F (-30°C – 60°C)			
	HDMI	Digital PC / Digital Video Input	Dimensions (W x H x D)	380mm x 170mm (including extrusions) x 430mm (excluding lens)			
	Mini Dsub15	Analog PC / Component Video Input	Weight	About 8.5kg (excluding projection lens)			
	Mini jack x3	Audio Input x2, Audio Output x1					
	Mini Jack x1	Connecting Wired Remote Controller					
	Dsub9	RS-232C Connection					
	USB type A	USB Connection / JPEG Still Images					
	RJ-45 (HDBase™)	HDBase™ Connection (Image, Audio, Control and Network)					
	RJ-45	Network Connection (1000BASE-T / 100BASE-TX / 10BASE-T)					

OPTIONAL LENSES	THROW RATIO	LENS SHIFT	ZOOM RATIO	SCREEN SIZE™	FOCAL LENGTH	F-NUMBER
STANDARD ZOOM LENS (RS-IL01ST)	1.49 – 2.24:1	V: 15% – 55% H: ± 10%	1.5x	40" – 600"	23.0 – 34.5mm	1.89 – 2.65
LONG FOCUS ZOOM LENS (RS-IL02LZ)	2.19 – 3.74:1	V: 15% – 55% H: ± 10%	1.7x	40" – 600"	34.0 – 57.7mm	1.99 – 2.83
FIXED SHORT FOCUS LENS (RS-IL03WV)	0.80:1	V: 5% – 5% H: ± 2%	Fixed	40" – 300"	12.8mm	2.0
ULTRA TELEPHOTO ZOOM LENS (RS-IL04UL)	3.55 – 6.94:1	V: 15% – 55% H: ± 10%	1.95x	60" – 600"	53.6 – 105.6mm	2.34 – 2.81
WIDE ZOOM LENS (RS-IL05WVZ)	1.00 – 1.50:1	V: 15% – 55% H: ± 10%	1.5x	40" – 600"	15.6 – 23.3mm	2.09 – 2.34


¹ When using the optional projection lens RS-IL01ST (projection lens sold separately). ² When the lamp mode is in Full Power mode / Power Saver mode; value for Power Saver mode is a calculated value thus cannot be guaranteed as specifications. ³ When the Lamp Control function is ON. ⁴ Varies depending on the combination of the HDBase™ and networks settings. ⁵ This time guarantee a 50% survival rate and a 50% brightness-maintenance rate. This value does not guarantee the service life of the lamp.

WHAT'S IN THE BOX

Projector, Power Cord, PC Connection Cable, Remote Controller RS-RC04 (includes AAA batteries), Important Information (Book), User's Manual (CD-ROM), Warranty Card

ACCESSORIES ITEMS

Replacement Lamp RS-LP09 (9963B001), Replacement Air Filter RS-FL01 (4971B001), Remote Controller RS-RC04 (4970B001), Remote Controller RS-RC05 (With Wired Connection Option) (5750B001), Ceiling Mount RS-CL11 (4969B001), Ceiling Extension RS-CL08 (16" – 24") (3096B001), Ceiling Extension RS-CL09 (24" – 39") (3097B001), Top Cover RS-TC01 (Dark Grey) (5471B001)

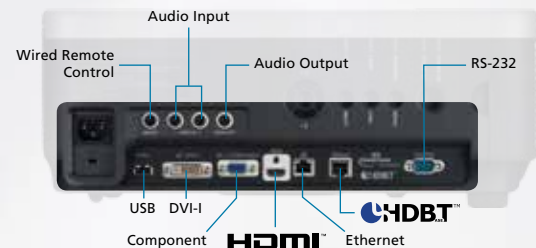

Canon Offices

INDIA
Canon India Pvt. Ltd.
Tel: 6124-416-0000 Fax: 124-416-0011
www.canon.co.in

MALAYSIA
Canon Marketing (Malaysia) Sdn. Bhd.
Tel: 60-3-78446000 Fax: 603-7847 7222
www.canon.com.my

SINGAPORE
Canon Singapore Pte. Ltd. (Domestic Operations)
Tel: 65-6799-8888 Fax: 65-6798-8882
www.canon.com.sg

THAILAND
Canon Marketing (Thailand) Co. Ltd.
Tel: 02-344-9988 Fax: 02-344-9861
www.canon.co.th

Vietnam
Canon Marketing Vietnam Co. Ltd.
Ho Chi Minh City Hanoi
Tel: 848-3820-0466 Tel: 844-37711677
Fax: 848-3820-0477 Fax: 844-37711678

Canon Business Partners

BANGLADESH
J.A.N. Associates Ltd.
Tel: 880-2-9660601 Fax: 880-2-8610410

BRUNEI
Interhouse Company Sdn. Bhd.
Tel: 673-2-653001 Fax: 673-2-653003

CAMBODIA
i-Click (Cambodia) Pte. Ltd.
Tel: 855-23-996638 Fax: 855-23-996639

INDONESIA
PT Datascrip
Canon Call Center
Tel: 021-2922-6000
Fax: 62-21-6544811 to 13
www.canon.co.id

Maldives
SIMDI Company (Pvt) Ltd.
Tel: 960-3334421
Fax: 960-3334424

MYANMAR
Myanmar Golden Rock
International Co. Ltd.
Tel: 001-95-1654810 to 654819
Fax: 001-95-1654820

NEPAL
International Electronics
Concern (P) Ltd.
Tel: 977-1-4421991
Fax: 977-1-4421909

PAKISTAN
Shirazi Trading Co. (Pvt) Ltd.
Tel: 92-21-32417737, 32417746
Fax: 92-21-32417747

SRI LANKA
Metropolitan Office (Pvt) Ltd.
Tel: 94-114-700-200
Fax: 94-114-700-398

Dealer's Stamp

020W127

Canon

**SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.
1 Fusionopolis Place,
#15-10 Galaxis, Singapore 138522
www.canon-asia.com